

WIND


Thies
CLIMA



T H E W O R L D O F W E A T H E R D A T A

THE WORLD OF WEATHER DATA

Measurement and Documentation: Thies' range of service for meteorology, environmental protection and industry



Today more than ever, the measurement, processing and analysis of meteorological data requires a high degree of measurement instrument precision and an optimal adaption of the data acquired to the task at hand.

For more than 50 years, we have been developing, producing and supplying practical instruments and systems for the analysis of weather data. Today we are one of the world's largest suppliers of such equipment.

Our close cooperation with scientific institutions and governmental agencies in many countries guarantees a constant and up-to-date flow of information about all aspects of individual national problems and projects and the rapid implementation of state-of-the-art developments and measurement techniques. Our instruments and systems fulfill in all respects both to the requirements of national weather services as well as those of the World Meteorological Organization in Geneva.

Meteorological observations without computer-aided measurement and documentation systems are unthinkable today. THIES develops complete ready-for-use-systems which include precision data transmitters, data loggers, power supply units and personal computers with adapted software.



Damping coefficient	The damping coefficient characterises the oscillations of the wind vane. It is an important characteristic quantity for the qualitative evaluation of the wind vane. The damping coefficient is determined from the amplitudes of two successive excursions and is calculated by means of an equation.																																								
Damping ratio	Measure for the damping of wind vanes. It represents the ratio between the consecutive damped deflection amplitudes (for example 3rd amplitude to 1st amplitude) in one direction.																																								
Wind run	The path covered by the wind for a certain period of time.																																								
Gray-Code	A digital code for wind direction whereby the codes for consecutive numbers differ by only one bit.																																								
Delay distance	The path covered by the wind which is reached when, after a sudden change in wind speed, the speed reaches 63% of its end value.																																								
Stress	Maximum allowable wind speed at which no damage occurs on the wind measuring instruments.																																								
Wind force	»Beaufort« (bft) classes for certain wind speed ranges. <table><tr><td>bft</td><td>m/s</td><td>bft</td><td>m/s</td></tr><tr><td>0</td><td>0 - 0,2</td><td>9</td><td>20,8 - 24,4</td></tr><tr><td>1</td><td>0,3 - 1,5</td><td>10</td><td>24,5 - 28,4</td></tr><tr><td>2</td><td>1,6 - 3,3</td><td>11</td><td>28,5 - 32,6</td></tr><tr><td>3</td><td>3,4 - 5,4</td><td>12</td><td>32,7 - 36,9</td></tr><tr><td>4</td><td>5,5 - 7,9</td><td>13</td><td>37,0 - 41,4</td></tr><tr><td>5</td><td>8,0 - 10,7</td><td>14</td><td>41,5 - 46,1</td></tr><tr><td>6</td><td>10,8- 13,8</td><td>15</td><td>46,2 - 50,9</td></tr><tr><td>7</td><td>13,9 - 17,1</td><td>16</td><td>51,0 - 56,0</td></tr><tr><td>8</td><td>17,2 - 20,7</td><td>17</td><td>56,1 - 61,2</td></tr></table>	bft	m/s	bft	m/s	0	0 - 0,2	9	20,8 - 24,4	1	0,3 - 1,5	10	24,5 - 28,4	2	1,6 - 3,3	11	28,5 - 32,6	3	3,4 - 5,4	12	32,7 - 36,9	4	5,5 - 7,9	13	37,0 - 41,4	5	8,0 - 10,7	14	41,5 - 46,1	6	10,8- 13,8	15	46,2 - 50,9	7	13,9 - 17,1	16	51,0 - 56,0	8	17,2 - 20,7	17	56,1 - 61,2
bft	m/s	bft	m/s																																						
0	0 - 0,2	9	20,8 - 24,4																																						
1	0,3 - 1,5	10	24,5 - 28,4																																						
2	1,6 - 3,3	11	28,5 - 32,6																																						
3	3,4 - 5,4	12	32,7 - 36,9																																						
4	5,5 - 7,9	13	37,0 - 41,4																																						
5	8,0 - 10,7	14	41,5 - 46,1																																						
6	10,8- 13,8	15	46,2 - 50,9																																						
7	13,9 - 17,1	16	51,0 - 56,0																																						
8	17,2 - 20,7	17	56,1 - 61,2																																						
Wind speed	The most common units of measurement are: 1 m/s = 3.6 km/h = 1.9455 knots																																								
Wind direction	Information on the direction from which the wind is coming. Information appears clockwise from North to East (90°), South (180°) and West (270°) and North (360°).																																								
Starting value	The wind speed at which a cup anemometer respectively the wind vane starts to move.																																								
Detection limit	The lowest value of wind speed and wind direction at which a stable value sets in.																																								
Variation	The range within which wind direction has changed within the preceding 10 minutes (in accordance with ICAO).																																								
Gliding mean value	The mean value which is updated as the mean value time at short time intervals. (for example the 10 min.-mean value is updated once a second)																																								
Arithmetic mean value	The quotient from the sum of all the individual values and the number of values within the mean value time.																																								
Vectorial mean value	Method of calculation: The individual vectors, measured as wind speed and direction, are decomposed into rectangular components. The components are averaged arithmetically, these mean values are then composed into a vectorial mean value.																																								
Vectorial mean value with standard vectors	Only used for wind direction. A constant wind speed is assumed for the individual vectors.																																								

Wind Ultrasonic

System Examples:

The Ultrasonic Anemometer 2D with acoustic measuring principle allows a high precision measurement of running variable wind dimensions and an inertia-free peak value acquisition.

Applications:

- Meteorology
- Climatic Network
- Research
- Development



ultrasonic
anemometer 2D



power supply unit
connection box



displays



pc-software
»Online-Wind«



datalogger

standard input
for example:
0 ... 20 mA

- visualisation
- recording

- recording
- controlling
- data processing

THIES projects, configures, and supplies your individual system. Of course, your measurement tasks and the existing system pre-conditions will be in our focus.

Please do not hesitate to contact us for a detailed information.

Description	Order-No.	Technical Data
<p>Anemometer Ultrasonic 2D</p> <p>The Ultrasonic-Anemometer serves for the acquisition of the horizontal components of the wind speed, wind direction, and virtual temperature.</p> <p>The measuring values are output in digital and analogue form. The analogue values are available as voltage- or current signals for wind speed and wind direction.</p> <p>The measuring values can be output alternatively as instantaneous values or as gliding mean values of 1s, 10 s, 1, 2 and 10 minutes.</p> <p>The output formats of the data telegrams and analogue signals as well as the user-specific parameters such as north correction, are selectable via the serial interface.</p> <p>The sensor arms are automatically heated in case of critical ambient temperatures, so that the function is guaranteed even with snow and icing rain.</p> <p>The instrument can be mounted onto a mast of \varnothing 50 mm.</p>	4.3800.00.XXX	<p>Wind Speed</p> <p>Meas. range 0 - 65 m/s</p> <p>Resolution 0,1 m/s</p> <p>Accuracy $\pm 0,1$ m/s (0 - 5 m/s) $\pm 2\%$ rms (> 5 m/s)</p> <p>Wind direction</p> <p>Meas. range 1 - 360°</p> <p>Resolution 1°</p> <p>Accuracy $\pm 1^\circ$</p> <p>Virtual Temp</p> <p>Meas. range - 40 - + 70 °C</p> <p>Resolution 0,1 K</p> <p>Accuracy $\pm 0,5$ K</p> <p>Data output digital</p> <p>Interface RS 485 / 422</p> <p>Baud rate 1200...19200</p> <p>output rate selectable instantaneous value or gliding mean value 1 per 100 m/sec. up to 1 per 25 sec.</p> <p>Status signal selectable heating, meas. distance error, δT distance temp.</p> <p>Data output analogue</p> <p>Electr. output only WS and WD 0 - 10 V (>1 kΩ) or 0/4 - 20 mA (≤ 250 Ω)</p> <p>Output Instantaneous value or gliding mean value</p> <p>Output rate 1 pro 100 msec.</p> <p>Resolution 12 bit</p> <p>General</p> <p>Internal meas. rate 400 Hz at 25°</p> <p>Averaging for WS and WD vectorial or scalar</p> <p>Operating voltage w/o heating 12 - 24 V AC/DC, 3 VA</p> <p>with heating Electr. 24 V AC/DC, 70 VA</p> <p>connection 16 pole plug</p> <p>Housing material stainless steel, V4A</p> <p>Protection IP 65</p> <p>Dimensions 420 x 270 mm</p> <p>Weight 2.5 kg</p>
<p>Anemometer Ultrasonic 2D</p> <p>Thanks to the additionally installed US transducer heating the anemometer is especially suited for the difficult use in high mountains or other critical measuring places where you have to reckon on snow or icing.</p>	4.3800.20.XXX	<p>Techn. Data see above</p>
<p>Accessories</p>		
<p>Connection Cable, compl. (not depicted)</p> <p>Shielded cable with plug to the transmitter and multi-core cable end.</p>	<p>506702</p> <p>506872</p> <p>506883</p>	<p>Cable length 15 m</p> <p>25 m</p> <p>30 m</p>
<p>Software Meteo- Online</p>	9.1700.98.XXX	see page 28



Wind Ultrasonic, Advance



Model Brief Description

Anemometer Ultrasonic 2D a

The Ultrasonic-Anemometer serves for the acquisition of the horizontal components of the **wind speed, wind direction, and virtual temperature**.

More efficient instrument compared with Ultrasonic 4.3800 due to broaden technology. Therefore especially suited for the use in the domain of science.

- configurations acc. to customer or factory requirements with many alternatives for commands .
- other pre-defined data telegrams, for ex. scientific diagnosis telegram, error telegram.

The measuring values can be output as digital and/or analogue values.

Digital output:
An interface RS485/422 is available for serial communication. It can be operated in full- or semi-duplex mode.

For the output of measuring values are available: some pre-defined telegrams or a user-defined telegram (for ex. WS, WD, virtual-temp., standard deviation, status information, NMEA etc.)

Analogue outputs:
Wind speed and direction are output alternatively as current or voltage signal.

The scaling of measuring range of the analogue outputs are selectable for WS and WD.

The analogue outputs can be connected optionally as analogue voltage inputs (max. 3 units.) Output via serial interface with user-defined telegram.

The sensor arms are automatically heated in case of critical ambient temperatures, so that the function is guaranteed even with snow and icing rain.

The instrument can be mounted onto a mast of Ø 50 mm.

Order-No.

4.3810.00.xxx

Technical Data

Wind speed

Measuring range	0 - 65 m/s
Resolution	0,1 m/s (standard) 0,01 (user-defined)
Accuracy	± 0,1 m/s rms (0 - 5 m/s) ± 2% rms (> 5 m/s)

Wind direction

Measuring range	0 - 360° (0-540°, 0-720°)
Resolution	1°
Accuracy	± 1°

Virtual Temp.

Measuring range	- 40 - + 70 °C
Resolution	0,1 K
Accuracy	± 0,5 K

Data output digital

Interface	RS 485 / 422
Baud rate	1200...921600 selectable
Output	instantaneous values or gliding mean values of 0,5 sec.- 100 min.

Output rate	1 per 1 msec. to 1 per 60 sec.
-------------	-----------------------------------

Status signal

selectable
heating, meas.
distance error, δT
distance temp.

Data output analogue

Electr. output (only WS and WD)	0- 20 mA / 0 - 10 V or 4 - 20 mA / 2 – 10 V
------------------------------------	------------------------------------------------

Load

Current output	max. 400 Ω
Voltage output	min. 4000 Ω

or as:

Data input	0...10 V
------------	----------


Output	instantaneous values or gliding mean values of 0,5 sec.- 100 min.
--------	-------------------------------------------------------------------------

Output rate	1 per 100 msec.
Resolution	12 bit

General


Internal meas.rate	max. 1500 Hz at 25°
Averaging for WS and WD	vectorial or scalar
Operating voltage w/o heating	12 - 24 V AC/DC, 3 VA
with heating	24 V AC/DC, max. 70 VA
Electr. connection	8 pole plug
Housing material	stainless steel, V4A
dimensions	420 x 270 mm
Weight	2,5 kg
EMC	EN 55022 5/95 B EN 50082-2 2/96

Wind Ultrasonic, Advance

Model Brief Description	Order-No.	Technical Data	
Anemometer Ultrasonic 2D a Thanks to the additionally installed US transducer heating the anemometer is especially suited for the difficult use in high mountains or other critical measuring places where you have to reckon on snow or icing.	4.3810.20.XXX	Techn. Data See above	
Device to Refuse Birds The device to refuse birds prevents the birds from sitting on, thus avoiding possible damages at the instrument. Suitable for: Ultrasonic Anemometer 4.3800.... u. 4.3810....	507245		

Wind Classic

System Examples:

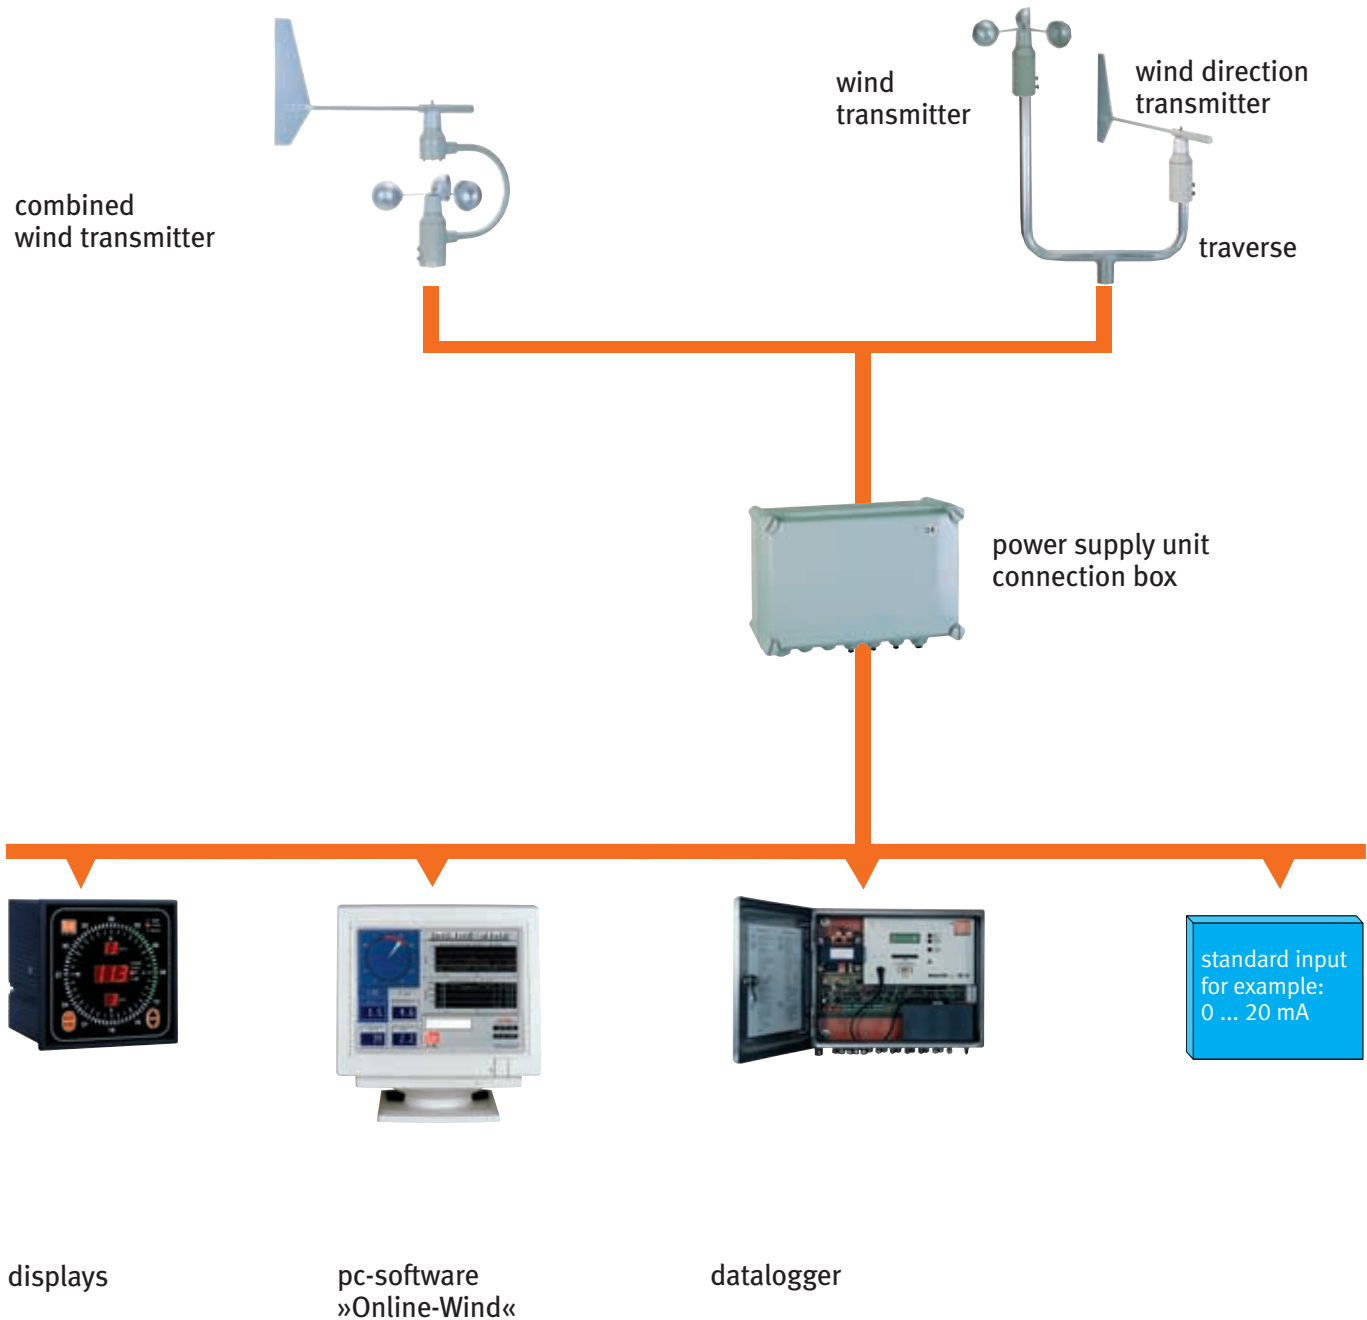

■ visualisation
■ recording

■ data processing
■ controlling
■ recording

THIES projects, configures, and supplies your individual system. Of course, your measurement tasks and the existing system pre-conditions will be in our focus.

Please do not hesitate to contact us for a detailed information.

Wind Classic

Description	Order-No.	Technical Data	
Wind Speed Transmitters			
Wind Transmitter The wind transmitters is designed for the direction-independent measurement of the horizontal air-flow. The wind transmitter is equipped with a contact-free opto-electronic scanner, which causes an extremely low starting speed. At the output the measuring value is available as digital signal. The heating is electronically controlled. A plug-connection is situated in the shaft of the instrument. The instrument is mounted preferably onto a mast or traverse. All essential parts are made of anodised aluminium, and are additionally varnished.	4.3303.22.xxx .000 .007	Meas. range Electr. output (for datalogger) Load Delay distance Accuracy Operating voltage Electronics Heating General Ambient temp. Electr. connection with x.xxxx.xx.000 with x.xxxx.xx.007 Mounting Fixing boring Dimensions Protection Weight	0.3 ... 50 m/s 3 ... 1042 Hz (live zero) 3 ... 1042 Hz (no live zero) max. 60 m/s 5 m ± 0.3 m/s / ± 2% of m.v. 4...18 V DC 24 V AC/DC ; 20 W -35 ... +80°C 5-pole plug connection 7-pole plug connection onto mast tube 1 1/2" Ø 50 x 50 mm Ø 315 x 230 mm IP 55 1 kg
Wind Transmitter This wind transmitter is designed for high wind speeds.	4.3303.22.0xx 008 018	Meas. range Electr. output Accuracy Operating voltage Electronics Heating Electr. connection	0.5 ... 75 m/s 0 ... 754 Hz (live zero) 0 ... 754 Hz (no live zero) ± 0.5 m/s / ± 2% of m.v. 4...18 V DC 24 V AC/DC ; 20 W 5-pole plug connection
Wind Transmitter The wind transmitter is equipped with a contact-free opto-electronic scanner. A connected electronics converts the speed-dependent frequency into an analogue output signal.	4.3303.22.xxx .0xx .6xx .x40 .x41 .x60 .x61 .x73	Meas. range Electr. output Accuracy Operating voltage Electronics Heating Electr. connection	0,3 ... 50 m/s 0,3 ... 60 m/s 0 ... 20 mA 4 ... 20 mA 0 ... 1 V 0 ... 10 V 0 ... 5 V ± 0,4 m/s / ± 2,5% v. Mw. 15...24 V DC 24 V AC/DC ; 20 W 5-pole plug connection
Wind Transmitter This wind transmitter is equipped with a DC-generator which produces a d.c-voltage with the rotation of the cup star. It is able to operate a respective display instrument directly (without current supply).	4.3105.22.000	Meas. range Electr. output Load Accuracy Heating Electr. connection	0.5 ... 35 m/s 0 ... 4.67 mA DC, linear Ra = 400 Ω max. 60 m/s ± 0.5 m/s / ± 2% v. Mw. 24 V AC/DC; 20 W 5-pole plug connection



Wind Classic



Description

Wind Direction Transmitter

Wind Direction Transmitter

Measuring value transmitter for measuring the direction of the horizontal air flow.

Potentiometer-wind-direction-transmitters are equipped with a sliding potentiometer which offers a theoretically unlimited resolution.

The heating is electronically controlled. A plug-connection is situated in the shaft of the instrument. The instrument is mounted preferably onto a mast or traverse. All main parts are made of anodised aluminium, and are additionally varnished.

Order-No.

4.3120.22.xxx
.012
.018

Technical Data

Potentiometer	Measuring Range
0 - 2000 Ω	358 ° ($\pm 3^\circ$) 5
0 - 400 Ω	-lead circuit
Measuring range	0 - 360°
Resolution	1°
Accuracy	$\pm 1.5^\circ$
Operating voltage	
Potentiometer	12 V DC, max 1.5 W
Heating	24 V AC/DC, max. 20W
Load	max. 60 m/s
Starting value	0.5 m/s at 90°
Damping coefficient	0.2 ... 0.3
Ambient temperature	- 35 ... + 80 °C
Electr. connection	8-pole plug connection
Mounting	onto mast tube 1 1/2"
Dimensions	415 mm high
Protection	IP 55
Weight	1.8 kg



Wind Direction Transmitter

Measuring value transmitter for measuring the direction of the horizontal air flow.

The wind direction transmitter is equipped with an opto-electronic scanner (code disc), which causes an extremely low starting speed, and operates in wear-resistant manner. The digital measuring signals are transformed by an internal measuring transformer.

The output is available as analogue current- or voltage signal.

4.3125.32.xxx
.040
.041
.060
.061
.073

Analogue Output	0 - 20 mA
	4 - 20 mA
	0 - 1 V
	0 - 10 V
	0 - 5 V

Measuring range	0 - 360°
Resolution	2,5°
Accuracy	$\pm 2,5^\circ$
Load	max. 60 m/s
Starting value	< 0.6 m/s at 90°
Damping coefficient	0.2 ... 0,3
Operating voltage	14 - 18 V DC
Heating	24 V AC/DC, max. 20 W
Ambient temperature	- 35 ... + 80 °C
Electr. connection	5-pole plug connection
Mounting	onto a mast tube
	1 1/2"
Dimensions	415 mm high
Weight	1,8 kg



Wind Direction Transmitter

Measuring value transmitter for measuring the direction of the horizontal air flow.

The position of the wind vane is detected opto-electronically by a code disc, which causes an extremely low starting speed, and operates in wear-resistant manner.

The output is available as serial or as parallel digital signal.


4.3121.32.000
4.3125.32.100

Digital Output	8-bit parallel
	8-bit THIES serial
Measuring range	0 - 360°
Resolution	2.5°
Accuracy	$\pm 2.5^\circ$
Load	max. 60 m/s
Starting value	< 0.6 m/s at 90°
Damping coefficient	0.2 ... 0.3
Operating voltage	
Electronics	5 / 3.5 - 18 V DC
Heating	24 V AC/DC, max. 20W
Ambient temperature	- 35 ... + 80 °C
Electr. connection	
with xx.xxxx.000	19 pole plug connection
with xx.xxxx.100	7-pole plug connection
Mounting	onto a mast tube
	1 1/2"
Dimensions	415 mm high
Weight	1.8 kg

Desription	Order-No.	Technical Data
<p>Combined Wind Transmitter</p> <p>Combined Wind Transmitter Measuring value transmitter for the measurement of the wind speed and wind direction of the horizontal air flow.</p> <p>The cup star revolution is scanned opto-electronically in contact-free and wear-resistant manner. It has an extremely low starting speed.</p> <p>The position of the wind vane is detected opto-electronically by a code disc. The digital measuring signals are transformed by an internal measuring transformer.</p> <p>The output signals are available as current or voltage signals.</p> <p>The heating is controlled electronically. A plug connection is situated in the shaft of the instrument. The instrument is mounted preferably onto a mast.</p> <p>All main parts are made of anodised aluminium, and are additionally varnished.</p>	<p>4.3324.31.xxx .0xx .6xx .x40 .x41 .x61 .x73</p>	<p>Meas. range WS 0.3 ... 50 m/s 0.3 ... 60 m/s</p> <p>Electr. output 0 - 20 mA 4 - 20 mA 0 - 10 V 0 - 5 V</p> <p>Meas. range WD 0 - 360°</p> <p>Accuracy ±0.5 m/s or ±2.0 % of meas. value ±2.5°</p> <p>Load max. 60 m/s</p> <p>Delay distance 5 m</p> <p>Responsiveness < 0,6 m/s at 90°</p> <p>Damping coefficient 0.2 ... 0.3</p> <p>Operating voltage 14 ... 18 V DC or 24 V AC/DC w. heating</p> <p>Heating max. 40 W</p> <p>Ambient temp. -35 ... +80°C</p> <p>Electr. connection multi-pole plug</p> <p>Fixing boring Ø 50 x 50 mm</p> <p>Mounting onto mast tube 1 1/2"</p> <p>Total height 620 mm</p> <p>Protection IP 55</p> <p>Weight 3.4 kg</p>
<p>Combined Wind Transmitter Measuring value transmitter for the measurement of the wind speed and wind direction of the horizontal air flow.</p> <p>The cup star revolution is scanned opto-electronically in contact-free and wear-resistant manner. It has an extremely low starting speed.</p> <p>The position of the wind vane is detected opto-electronically by a code disc.</p> <p>The output signals are available as frequency for wind speed, and as 8-bit-Gray-code (parallel) for wind direction.</p> <p>The ship-version is equipped with a strengthened cup star and a smaller wind vane.</p>	<p>4.3324.31.000 .001</p>	<p>Model Standard land version Ship version</p> <p>Meas. range 0.3 ... 50 m/s 0 ... 360°</p> <p>Electr. output 3 ... 1042 Hz 8-bit-Gray-code (parallel)</p> <p>Resolution 0.05 m ; 2.5°</p> <p>Accuracy ±0,3 m/s or ±2 % of meas. value ±1,5°</p> <p>Operating voltage 15 V DC (5 ... 18 V) or 24 AC/DC, w. heating</p> <p>Load max. 60 m/s</p> <p>Delay distance 5 m</p> <p>Responsiveness < 0.6 m/s at 90°</p> <p>Damping coefficient 0.2 ... 0.3</p> <p>Heating max. 40 W</p> <p>Ambient temp. -35 ... +80°C</p> <p>Electr. connection multi-pole plug</p> <p>Fixing boring Ø 50 x 50 mm</p> <p>Mounting onto mast tube 1 1/2"</p> <p>Total height 620 mm</p> <p>Weight 3,4 kg</p>



Wind Classic

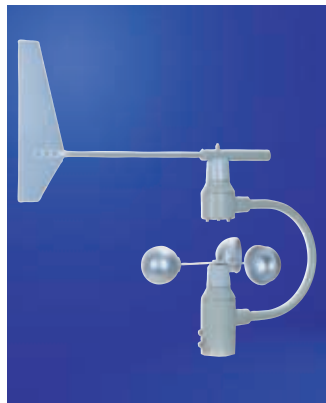

Desription	Order-No.	Technical Data	
Combined Wind Transmitter Measuring value transmitter for the measurement of the wind speed and wind direction of the horizontal air flow. The cup star revolution is scanned opto-electronically in contact-free and wear-resistant manner. It has an extremely low starting speed. The position of the wind vane is detected opto-electronically by a code disc. The output signals are available as frequency for the wind speed and as serial-synchronous 8-bit for wind direction. The ship-version is equipped with a strengthened cup star and a smaller wind vane.	4.3336.21.000 4.3336.31.000 .001	Model	for data logger standard land ship version
		Meas. range ws	0.3 ... 50 m/s
		Meas. range wd	0 ... 360°
		Electr. output ws	3 ... 1042 Hz
		Electr. output wd	serial synchron. 16 bit
		Resolution	0.05 m ; 2.5°
		Accuracy	± 0.3 m/s or ± 2 % of meas. value ± 1.5°
		Load	max. 60 m/s
		Delay distance	5 m
		Starting value	< 0.6 m/s at 90°
		Damping coefficient	0.2 ... 0.3
		Operating voltage	4 ... 18 V DC
		Heating	40 W, 24 V AC/DC
		Ambient temp.	-35 ... +80°C
		Electr. connection	multi-pole plug
		Fixing boring	Ø 50 x 50 mm
		Mounting	onto mast tube 1 1/2"
		Total height	620 mm
		Protection	IP 55
		Weight	3.4 kg

Wind First Class

Description	Order-No.	Technical Data
Wind Speed Transmitter		
Wind Transmitter “First Class” The wind transmitter is designed for the acquisition of the horizontal component of the wind speed in the field of meteorology and environmental measuring technology, evaluation of location, and measurement of capacity characteristics of wind power systems. In the plain country the wind transmitter meets all requirements of IEC 61400.121-CD for a 1. class instrument. Special characters are a defined and optimised, dynamic behaviour also at high turbulence intensity, minimal over-speeding, and a low starting value. The measuring value is available at the output as digital signal. It can be transmitted to display instruments, recording instruments, data loggers as well as to process control systems. For winter operation the instrument is equipped with an electronically regulated heating, which guarantees a smooth running of the ball bearings, and prevents the shaft and slot from icing-up	4.3350.00.000 .10.	With heating W/o heating Measuring range 0.3...75 m/s Accuracy 0,3 ... 50 m/s 50 ... 75 m/s Linearity Inclined flow ...mean deviation from the cosinus line Turbulence effect Electr. output Load Delay distance Operating voltage Electronics Heating Ambient temp. Electr. connection Mounting Fixing boring Dimensions Protection Weight Material Housing Cup star
		0.3...75 m/s < 3% of meas. value or < 0.3 m/s < 6% of meas. value r > 0.999 95 (4..20m/s) 1% (in the range ±20°) <1% (in the range up to 30% turbulence intensity) 1000 Hz at 50 m/s max. 85 m/s < 3 m 3.3 ... 42 V DC 24 V AC/DC; 25 W -50 ... + 80°C 8-pole plug connection onto mast tube R 1” Ø 35 x 25 mm 290 x 240 mm IP 55 0.5 kg alu, anodised carbon-fibre-reinforced plastic
Wind Direction Transmitter		
Wind Direction Transmitter “First Class” The wind transmitter is designed for the acquisition of the horizontal component of the wind direction in the field of meteorology and environmental measuring technology, evaluation of location, and measurement of capacity characteristics of wind power systems. Special characters are a defined and optimised, dynamic behaviour. Depending on the transmitter model the measuring value is available at the output as digital or analogue signal. The output signal can be transmitted to display instruments, recording instruments, data loggers as well as to process control systems. For winter operation the instrument is equipped with an electronically regulated heating.	4.3150.x0.0xx .10. .000 .110	With heating W/o heating Meas. range Accuracy Electr. output Resolution Electr. output Resolution General Operating voltage Electronics Potentiometer Heating Ambient temp. Starting value Damping coefficient Electr. connection Mounting Fixing boring Dimensions Protection Weight Material
		0...360° 1.5° digital, 9- bit Thies serial synchronous 1° Potentiom. 0 ... 10 000 W 1° 3,3 ... 42 V DC max. 0.5 W 24 V AC/DC; 25 W -50 ... + 80°C 0.5 m/s at 10° (acc. to ASTM D5366-96) ≥0.4 8-pole plug connection onto a mast tube R 1” Ø 35 x 25 mm 390 x 240 mm IP 55 0.5 kg alu, anodised




Wind Compact

System Examples:

Wind Sensor and Wind Direction Sensor for qualified technical Requirements.

Applications:

- Building Control Technology
- Industry
- Wind Power Systems
- Environmental Protection Sector
- Wind Warning Systems

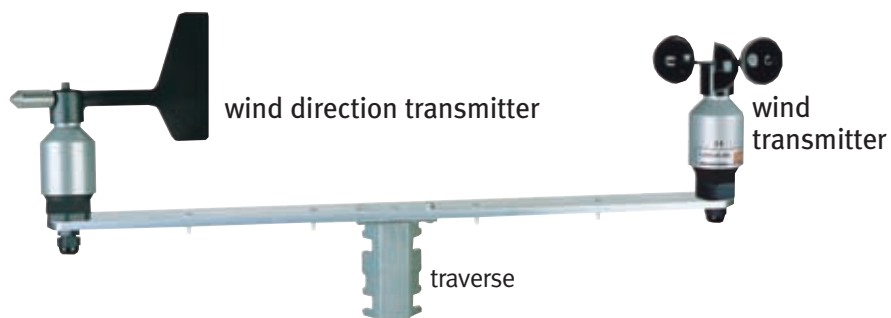

power supply unit
connection box



displays



pc-software
»Online-Wind«



datalogger

standard input
for example:
0/4 ... 20 mA

- visualisation
- recording

- recording
- controlling
- data processing

THIES projects, configures, and supplies your individual system. Of course, your measurement tasks and the existing system pre-conditions will be in our focus.

Please do not hesitate to contact us for a detailed information.

Wind Compact

Description	Order-No.	Technical Data	
Wind Speed Transmitters			
Wind Transmitter compact Measuring transmitter for the measurement of the horizontal wind speed with digital output signal (open collector). The cup-star consists of plastic, the housing is made of anodised aluminium and plastic. The instrument has a threaded pin PG 21 with 2 nuts for mounting.	4.3518.00.000 4.3520.00.000 4.3520.10.000	With heating With heating W/o heating Measuring range Accuracy Resolution Electr. output Operating voltage Current supply Heating Ambient temp. Cable Dimensions Protection Weight	open collector sink open collector source open collector source 0.5 ... 50 m/s ± 3 % of meas. value or ± 0.5 m/s < 0.1 m/s 2 ... 573 Hz 12 - 24 V DC 20 mA max. 20 W ; 24 V AC/DC - 30 ... + 70 °C 5m, LiYCY 5 x 0.25 mm² Ø 135 x 165 mm IP 55 0.4 kg
Wind Transmitter compact Measuring transmitter for the measurement of the horizontal wind speed with digital output signal (active signal). Suitable for data loggers. The cup-star consists of plastic, the housing is made of anodised aluminium and plastic. The instrument has a threaded pin PG 21 with 2 nuts for mounting.	4.3519.00.000	Measuring range Accuracy Resolution Electr. output Operating voltage Current consumpt. Heating Ambient temp. Cable Dimensions Weight	0.5 ... 50 m/s ± 3 % of meas. value or ± 0.5 m/s < 0.1 m/s 2 ... 630 Hz 4 - 18 V DC < 1 mA max. 20 W ; 24 V AC/DC - 30 ... + 70 °C 12m , LiYCY 6 x 0.25 mm² Ø 135 x 165 mm 0.75 kg
Wind Transmitter compact Measuring transmitter for the measurement of the horizontal wind speed with analogue output signals. The cup-star consists of plastic, the housing is made of anodised aluminium and plastic. The instrument has a threaded pin PG 21 with 2 nuts for mounting	4.3519.00.xxx .140 .141 .161 .167 .173	Electr. Output 0 - 20 mA 4 - 20 mA 0 - 10 V 0 - 2 V 0 - 5 V Measuring range Accuracy Resolution Operating voltage for 0 - 10 V output. Current supply Heating Ambient Temp. Cable Dimensions Weight:	Load (with operat. volt.) max. 500 Ω ; (≥13 V DC) max. 500 Ω ; (≥13 V DC) min. 1 kΩ min. 1 kΩ min. 1 kΩ 0.5 ... 50 m/s ± 3 % of meas. value or ± 0.5 m/s < 0.1 m/s 9 - 30 V DC or 24 V AC/DC 13 - 30 V DC approx. 10 mA, unloaded max. 20 W ; 24 V AC/DC - 30 ... + 70 °C 12 m, LiYCY 6 x 0.25 mm² Ø 135 x 165 mm 0.75 kg
Wind Transmitter compact Model with plug connection (without cable)	4.3518.00.700 4.3519.00.700 4.3519.00.741 4.3519.00.761	Plug connection Weight Other technical data see above	Multi-pole 0.4 kg



Wind Compact



Description

Wind Direction Transmitters

Wind Direction Transmitter compact

Measuring transmitter for the measurement of the horizontal wind direction with digital output signal (Gray-code).

The wind vane consists of plastic, the housing is made of anodised aluminium and plastic. The instrument has a threaded pin PG 21 with 2 nuts for mounting.

Order-No.

4.3128.xx.000
.00...
.10...

Technical Data

With heating	max. 20 W ; 24 V AC/DC
Without heating	
Measuring range	0 ... 360°
Accuracy	± 5°
Resolution	90°, 45°, 22,5°
Electr. output	2, 3, 4 bit Gray-code
Starting value	0.3 m/s at 90°
Operating voltage	18 ... 27 V DC
Current supply	20 mA
Ambient temp.	- 30 ... + 70 °C
Cable	5 m, LiYCY 8 x 0.25 mm ²
Dimensions	50 x 220 mm
Protection	IP 55
Weight	0.6 kg



Wind Direction Transmitter compact

Measuring transmitter for the measurement of the horizontal wind direction with digital output signal (Gray-code). Suited for data logger operation.

The wind vane consists of plastic, the housing is made of anodised aluminium and plastic. The instrument has a threaded pin PG 21 with 2 nuts for mounting.

4.3129.00.000

Measuring range	0 ... 360°
Accuracy	± 5°
Resolution	11.25°
Electr. output	serial synchronous 5 bit Gray-code
Operating voltage	5 - 18 V DC
Current supply	standby < 15 mA (5 V) active approx. 500 mA (5 V)
Heating	max. 20 W ; 24 V AC/DC
Ambient temp.	- 30 ... + 70 °C
Cable	12 m, LiYCY 6 x 0.25 mm ²
Dimensions	50 x 220 mm
Weight	1.1 kg



Wind Direction Transmitter compact

Measuring transmitter for the measurement of the horizontal wind direction with analogue output signals.

The wind vane consists of plastic, the housing is made of anodised aluminium and plastic. The instrument has a threaded pin PG 21 with 2 nuts for mounting.

4.3129.00.xxx
.140
.141
.161
.167
.173

Electr. output	Load (operat. Volt.)
0 - 20 mA	max. 500 Ω ; (13 V DC)
4 - 20 mA	max. 500 Ω ; (13 V DC)
0 - 10 V	min. 1 kΩ
0 - 2 V	min. 1 kΩ
0 - 5 V	min. 1 kΩ
Measuring range	0 ... 360°
Resolution	11.25°
Accuracy	± 5°
Operating voltage	9 - 30 V DC or 24 V AC/DC
for 0 - 10 V-output	13 - 30 V DC
Heating	max. 20 W ; 24 V AC/DC
Ambient temp.	- 30 ... + 70 °C
Cable	12m, LiYCY 6 x 0.25 mm ²
Dimensions	50 x 220 mm
Weight	1.1 kg

Wind Transmitter compact

Model with plug connection (without cable)

4.3129.00.700
4.3129.00.741
4.3129.00.761
4.3129.00.767

Plug connection	Multi-pole
Weight	0.4 kg

Other technical data see above

Wind

Small Wind Transmitter

Description	Order-No.	Technical Data	
Wind Speed Transmitters			
Small Wind Transmitter Measuring instrument for the direction-independent measurement of the horizontal air flow in the open. The sensor is a small construction with a DC-generator, which is moved by the revolution of the cup-star. The transmitter is made of synthetic material	4.3400.30.000	Measuring range Accuracy Electr. output Load Fixing boring Mounting Ambient temp. Cable Dimensions Protection Weight	0.5 ... 35 m/s ± 5% of meas.range or ± 0.5 m/s 0 ... 1 mA DC Ra = 800 Ω max. 60 m/s Ø 35 x 35 mm onto a mast tube 1" -25 ... +60°C, ice-free 20 m, LiYY 2 x 0.25 mm ² Ø 134 x 175 mm IP 54 0.3 kg
Small Wind Transmitter Measuring instrument for the direction-independent measurement of the horizontal air flow in the open. The sensor is a small construction with a Reed-contact, which is activated by the revolution of the cup-star. The transmitter is made of synthetic material	4.3515.30.000	Measuring range Accuracy Electr. output Resolution Load Contact load RV Fixing boring Mounting Ambient temp. Cable Dimensions Protection Weight	0.5 ... 40 m/s ± 5% of meas. range or ± 0.5 m/s 50 Hz at 40 m/s 0.8 m wind run max. 60 m/s max. 24 V DC 0.5 W, 100 Ω Ø 35 x 35 mm onto a mast tube 1" -25 ... +60°C, ice-free 20 m, LiYY 2 x 0.25 mm ² Ø 134 x 175 mm IP 54 0.3 kg
Small Wind Transmitter Measuring instrument for the direction-independent measurement of the horizontal air flow in the open. The sensor is a small construction with a Reed-contact, which is activated by the revolution of the cup-star. The housing is made of synthetic material.	4.3515.xx.xxx .50.xxx .51.xxx .0xx .1xx .x00 .x61	With heating Without heating Instrument colour Electr. output Measuring range Accuracy Resolution Load Contact load Fixing boring Mounting Ambient temp. Cable Dimension Protection Weight	max. 24 V DC; 24 W white black 0 ... 100 Hz 0 ... 10 V 1 ... 40 m/s ± 5% of meas. range or ± 0.5 m/s 0.4 m wind run (..x00) max. 60 m/s 10 VA, max. 42 V DC max. 0.4 A Ø 35 x 35 mm on mounting angle -25 ... +60°C 3 m; LiYY 4 x 0.5 mm ² or 2 x 0.5 mm ² Ø 134 x 160 mm IP 54 0.3 kg



Small Wind Transmitters are ideal measuring transmitters with best price/performance-ratio for standard requirements.

Applications:

- Control technique
- Building control system

Wind

Small Wind Transmitter



Description

Wind Direction Transmitters

Wind Direction Transmitter

Measuring sensor for the measurement of the horizontal wind direction in the open. The instrument is a small construction with a potentiometer or Reed-contact, which are activated in correspondence to the position of the wind vane. The instrument is made of synthetic material.

Order-No.

4.3124.30.018

4.3127.40.000

Technical Data

Electr. output	0 - 400 Ω (358°)
Resolution	0.5°, 5-lead circuit
Electr. output	8 Reed contacts
Resolution	22.5°
Measuring range	0 ... 358° / 0 ... 360°
Potentiometer load	max. 100 ma, 24 V, 2.5 W
Contact load	0.5 W, max. 60 V DC
Load	max. 60 m/s
Ambient temp.	-25 ... + 60° C, ice-free
Cable	20 m; LiYY 5 x 0.25 mm ² or 9 x 0.14 mm ²
Mounting	onto a mast tube 1"
Dimension	210 mm high
Protection	IP 54
Weight	0.55 kg



Wind Direction Transmitter

Measuring transmitter for the measurement of the horizontal wind direction. The measuring values are output as ohmic resistance-signals. The wind direction is detected by a wind vane, and is then transmitted to a potentiometer. The outer parts of the instrument are made of corrosion-resistant materials (plastic). Labyrinth gaskets protect the parts inside the instrument against humidity.

4.3140.51.010

Measuring range	10°... 350° (20° dead-zone in the north)
Electr. output	Potentiometer 0 ... 1 K Ω ($\pm 3\%$)
Responsiveness	1 m/s
Potentiometer load	max. 1.5 W
Ambient temperature	-25 ... + 60° C, ice-free
Electr. connection	3 m cable
Dimensions	210 mm high
Protection	IP 54
Weight	0.3 kg

Wind Direction-dependent

Description	Order-No.	Technical Data
<p>Anemometer Ultrasonic 1D</p> <p>The Ultrasonic Anemometer 1D serves for the acquisition of the horizontal air flow and direction in tunnels, tubes or similar applications. Due to the high measuring rate the instrument can be used also for the inertia-free measurement of gust- and peak-values.</p> <p>The measuring values are available as analogue signals and/or data telegram.</p> <p>The analogue output of the flow speed is effected with or without direction detecting.</p> <p>The digital output of the flow speed is effected with direction detecting, and virtual-temperature.</p> <p>If necessary, the sensor branches are automatically heated with critical ambient temperatures. Thus, the function is guaranteed also with negative temperatures.</p>	4.3860.00.340	<p>Flow Speed Meas. range 0 - 20 m/s Resolution 0.1 m/s Accuracy ± 0.1 m/s (0 - 5 m/s) $\pm 2\%$ rms (> 5 m/s)</p> <p>Direction detecting Meas. range $1^\circ / 181^\circ$</p> <p>Virtual Temp. Meas. range - 40 - + 70 °C Resolution 0,1 K Accuracy ± 0.5 K</p> <p>Data output digital Interface RS 485 / 422 Baud rate 9600 Output 10 sec. gliding mean value heating, path disturbance</p> <p>Data output analogue Electr. output 0 - 20 mA (< 250 W) only WS and WD output 10 sec. gliding mean value</p> <p>Operating voltage w/o heating 12 - 24 V AC/DC, 3 VA with heating 24 V AC/DC, 70 VA Electr. connection 3 m cable Housing material stainless steel, V4A Dimensions 420 x 270 mm Protection IP 66 Weight 2.5 kg</p>
<p>Wind Transmitter for tunnel application</p> <p>For the measurement of directional air flows especially in tunnels. Instrument sends frequency signals, depending on speed and related to the flow direction.</p> <p>Instrument is equipped with a mounting bar.</p> <p>Suitable for connection to the Measuring Transducer TW, order-no. 4.3348.xx.xxx</p>	4.3308.10.000	<p>Measuring range 0.3 ... 20 m/s Resolution approx. 0,05 m wind run</p> <p>Delay distance 3.3 m Electr. output 0 ... 410 Hz resp. 418 Hz</p> <p>Propeller type 4-blade, polypropylene Ø 180 mm</p> <p>Dimension Ø 180 mm Operating voltage 15 V DC (10 - 16 V DC) Current supply approx.. 15 mA Ambient temp. -20 ... +70 °C, ice-free Cable 3 m, LiYCY 4 x 0.25 mm²</p> <p>Dimensions Ø 200 x 350 mm Weight 5 kg</p>



Measuring transmitter for directional air flows.

Applications:

- Air Channels Shafts
- Climatic Ducts
- Street and Railway Tunnels

Wind

Direction-dependent



Description	Order-No.	Technical Data	
Wind Transmitter for duct application	4.3311.30.000 4.3311.32.000	Operating voltage	15 V DC / approx. 0.3 mA 24 V DC
A fan wheel to determine the directional air flow in ducts. Mounting on a mast tube.		Measuring range	< 0.25 ... 20 m/s
The fan wheel revolutions are scanned opto-electronically by a reflective light barrier in a contact-free manner, thus causing a low starting speed.		Resolution	0.083 m wind run
See also : Measuring Transducer WG, order-no.. 4.3339.xx.xxx		Electr. output	0 ... 240 Hz
		Fan wheel type	8-blade aluminium
		dimensions	Ø 100 mm
		Ambient temp.	-20 ... +80°C, ice-free
		Cable	1 m long
		Fixing boring	Ø 37 x 20 mm
		Dimensions	108 x 148 x 65 mm
		Weight	0.9 kg

Measuring transmitter for directional air flows.

- Applications:
- Air Channels Shafts
 - Climatic Ducts
 - Street and Railway Tunnels

Wind Hand Instruments, Mech. Anemometer, Wind Measuring Systems

Wind

Description	Order-No.	Technical Data	
Cup-Anemometer A measuring instrument designed for hand use to take direct wind speed readings. Made of plastic.	4.3008.01.000	Measuring range 0 ... 120 km/h 0 ... 12 Beaufort 0 ... 35 m/s 0 ... 70 kn Dimensions Ø 100 x 205 mm Weight 0.32 kg	
Instrument case (not depicted) Transport and storage case for the above-mentioned anemometer.	4.3008.01.005	Material wood Dimensions 155 x 145 x 135 mm Weight 1.15 kg	
Wind Run Meter Mechanical measuring instrument for direction-independent measurement of the horizontal air flow and display of the wind run. The display count cumulatively the wind run. Instrument is mounted on the top of a mast. All main parts are made of anodised or varnished aluminium	4.3018.10.000	Counting range Resolution Digit height Inclination of counter Operating range Load Delay distance Ambient temp. Mounting Fixing boring Dimensions Weight	0 ... 999 999.9 km 100 m wind run 7 mm 50 ° 0.5 - 60 m/s max. 60 m/s 5 m - 35 ... + 80 °C onto a mast tube 1 1/2" acc.to DIN 2441 Ø 50 x 50 mm 318 x 260 mm 1.3 kg
Mechanical Wind Recorder A mechanical instrument designed to measure and record wind run and direction. A reading rule to determine both instantaneous and mean wind speed values is included in the shipment. The paper transport is carried out by a band mechanism with spring wound drive.	4.3900.20.000	Measuring range Scale division Recording width ws wd Period of registration Paper advance Operating range Ambient temp. Mounting Dimensions Weight	0 ... 10 km wind run 0 ... 360° 1 km ; 30° 50 mm = 10 km 36 mm = 360° 31 days 10 mm/h. 0,5 ... 60 m/s - 35 ... + 60 °C onto a mast tube, Ø 48 mm 155 x 200 x 725 mm 10.5 kg
Recording Roll (not depicted.) Wax coated paper for above-mentioned wind recorder.	205242	Paper length Width of roll	sufficient for 31 days 120 mm
Instrument Case (not depicted.) For a safe transport of the above instrument to varying measuring places.	4.3905.20.000	Material Dimension Weight	wood, unvarnished 710 x 320 x 290 mm 12.5 kg



Wind

Hand Instruments, Mech. Anemometer, Wind Measuring Systems



Description

Wind Direction Measuring Instrument

Simple portable instrument, consisting of a mechanical wind vane, and a telescopic tripod stand. There is a built-in compass to align the instrument to "North". Supplied in a carrying case

Order-No.

4.3019.21.000

Technical Data

Measuring range	0 ... 360°
Division	10° and N-NW-W ...N
Alignment	by compass
Stand, telescopic	28 to 115 cm
Dim. of case	395 x 285 x 120 mm
Weight	1 kg



METEO comp

Complete measuring instrument, ready for connection, consisting of the following components:

Comb. Wind Transmitter

Small combined measuring transmitter for acquisition of the wind speed and wind direction as well as of the ambient temperature.

4.3329.00.000

Measuring value	wind direction wind speed temperature wind-chill min.- and max.-values of the past 24 h.
-----------------	---------------------------------------------------------------------------------------------------------

Operating voltage	from display unit
Ambient temp.	-30 ... + 60 °C
Cable	20 m long, with plug on pin Ø 30 mm
Mounting	
Dimensions	200 x 450 mm
Weight	1 kg



Display Instrument

Digital LED-indicator inclusive power supply unit, with plug for the display of the above-mentioned measuring values. The changing-over to the single values is carried out via keypad. Plug-connection of wind sensor, power supply unit and serial data output. Housing is suited for wall mounting.

9.3229.00.000

Display ws	m/s ; km/h ; Bft
Resolution	0.1 m/s ; 1 km/h ; 1 Bft
Display wd	0 ... 360°
Resolution	22.5°
Display temp.	-30 ... + 60 °C -22 ... + 140 °F
Resolution	0.1 K ; 0.1 °F
Electr. output	RS 232/V.24, serial
Operating voltage	9 V DC / max. 500 mA
Ambient temp.	-30 ... + 60 °C, ice-free
Dimensions	
Display	95 x 155 x 35 mm
Power supply unit	65 x 100 x 55 mm
Weight	0.23 kg; 0.51 kg

Software Meteo-Online

9.1700.98.000

See page 28

Wind Precipitation, Brightness, Temperature, Air humidity

Description	Order-No.	Technical Data				
Clima Sensor 2000		Wind	Preci- pitation	Bright- ness	Tempe- rature	Air humidity
Clima Sensor 2000 WNHTF	4.9010.00.061	X	X	X	X	X
Clima Sensor 2000 WNH	4.9000.00.061	X	X	X		
Clima Sensor 2000 NHTF	4.9011.00.061		X	X	X	X
Clima Sensor 2000 NH	4.9001.00.061		X	X		
<p>The Clima Sensor 2000 serves for the measurement of important environmental data. Depending on the type of task it is available as combined measuring instrument. The analogue outputs are configured as standard signals so that they can be used for the coupling on commercially available bus systems.</p> <p>Wind A cup star, the revolution-no. of which is linear-proportional to the wind speed, supplies a frequency through a Reed-contact to a connected frequency-voltage-converter. The frequency is dependent on the revolution number.</p> <p>Precipitation The detection is carried out optically acc. to the reflection-method with modulated infrared-light on precipitation particles.</p> <p>Brightness The brightness is detected by means of three independent photo-diodes which are arranged in 90°-segments. Three independent output voltages are linear to the brightness.</p> <p>Temperature The temperature sensor is a standardised resistance thermometer – Pt 100 – of long-term stability.</p> <p>Air humidity The measurement is carried out with a capacitive humidity sensor changing its capacity according to the relative humidity.</p>	Wind	Measuring range Accuracy Electr. output Load	1 ... 40 m/s ± 0.5 m/s res. ± 5% of mr. 0 ... 10 V (= 0..40 m/s) > 10 kΩ			
	Precipitation	Measuring range Electr. output Sensitivity Load Switch-on-delay Switch-off-delay	rain yes / no 0 V for rain, 10 V with dryness fine drizzle > 100 kW approx. 3 rain particles approx. 2 minutes			
	Brightness	Measuring range Spectral range Accuracy Electr. output Load	0 ... 100 k Lux 700 ... 1050 nm ± 10 % of measuring value 3 x 0 ... 10 V, Eastern Southern and Western direction > 10 kΩ			
	Temperature	Measuring range Measuring element Accuracy Electr. output Load	- 20 ... + 60 °C Pt100 acc. to IEC 751 1/3 DIN class B ± 0.15 °C at 0 °C 0 ... 10 V > 10 kΩ			
	Air humidity	Measuring range Accuracy Electr. output Load	0 ... 100 % rel. humidity ± 3 % in the range 10 ... 90 % rel. F. 0 ... 10 V > 10 kΩ			
	General	Operating voltage Current consumpt. Ambient temp. Connecting cable Mounting Weight	24 V AC ±15% 24 V DC ±25% < 100 mA - 40 °C... + 60 °C 10 m ; LiYCY 12 x 0.14 mm², uv-resistant max. 100 m at a supply with nominal 24 V retaining clamp, stainless steel, for mast or wall max. 1.5 kg			



Wind Measuring Transformers



Description

Measuring Transformers

Measuring Transformer WS

Instantaneous value

The speed-dependent frequency generated by the wind transmitters is converted into a current or voltage signal. This allows the control of connected recording, display or switching devices.

Suitable for wind transmitters
4.331.3x.000
4.3303.22.000 / 007
4:3303.22.008 / 018

Order-No.

4.3339.xx.xxx
4.3340.xx.xxx
.00...
.10...
.040
.041
.060
.061
.080
.081
.100
.101

Technical Data

Electr. output	Measuring range
0 ... 240 Hz, 15V	0 ... 20 m/s
3... 1042 Hz, 15V	0 ... 40/50/75 m/s
Model	wall mounting case
	pc-board
Electr. output	0 - 20 mA
	(max. 600 Ω)
	4 - 20 mA
	(max. 600 Ω)
	0 - 1 V (max. 10 mA)
	0 - 10 V (max. 10 mA)
	0 - 20 mA / 0 - 1 V
	0 - 20 mA / 0 - 10 V
	4 - 20 mA / 0 - 1 V
	4 - 20 mA / 0 - 10 V
Measuring value	instantaneous value
Operating voltage	230 V / 50 Hz
Ambient temp.	0 ... +40°C
Protection	IP 65
	(wall mounting case)
Dimensions	
Wall mount. case	200 x 120 x 75 mm
PC-board	170 x 100 x 30 mm
Weight	
Wall mount. case	0.65 kg
PC-board	0.25 kg



Measuring Transformer WSM

Mean value

The speed-dependent frequency generated by the wind transmitters is totalled up over the selected integration time and, as a mean value, converted into a current or voltage signal. This allows the control of connected recording, display or switching devices.

Suitable for the wind transmitters of the classic-line with frequency output
4.3303.22.000 / 007
4.3303.22.008 / 018

4.3341.xx.xxx
.00...
.10...
.040
.041
.060
.061
.080
.081
.100
.101

Model	Wall mounting case
	PC-board
Electr. output	0 - 20 mA
	(max. 600 Ω)
	4 - 20 mA
	(max. 600 Ω)
	0 - 1 V (max. 10 mA)
	0 - 10 V (max. 10 mA)
	0 - 20 mA / 0 - 1 V
	0 - 20 mA / 0 - 10 V
	4 - 20 mA / 0 - 1 V
	4 - 20 mA / 0 - 10 V
Electr. input	0 ... 1042 Hz (50 m/s)
Measuring value	mean value
Measuring range	selectable in 5 m/s-steps up to 50 m/s
Time of integration	2.5 / 5 / 10 / 15 / 30 / 60 / 120 min, selectable
Operating voltage	230 V / 50 Hz
Ambient temp.	0 ... +40°C
Protection	IP 65
	(wall mounting case)
Dimensions	
Wall mount. case	200 x 120 x 75 mm
PC-board	170 x 100 x 30 mm
Weight	
Wall mount. case	0.7 kg
PC-board	0.3 kg

Wind



Wind Indicators, Recorder, Software



Description

Indicators, WS

Digital Indicator WG

for panel mounting

Flat-section indicator for the display of wind speed values. The background of the indicator is black to facilitate reading of the red digits.

Preferably switch panel or front panel mounting

Order-No.

4.1044.00.xxx

.000

.040

.041

.061

Technical Data

Electr. Input	0 ... 834 Hz 0 ... 20 mA 4 ... 20 mA 0 ... + 10 V
Display range	0 ... 40.0 m/s , or depending on sensor type
Resolution	± 1 digit
Display	LED, red, 13 mm high
Operating voltage	230 V / 50 Hz
Model	switch panel mounting
Protection	IP 20
Dimensions	96 x 48 x 104 mm
Weight	0.3 kg.



Digital Indicator WG

for panel mounting

with 2 adjustable limit contacts

Flat-section indicator for the display of wind speed values. Two setting knobs on the front panel serve for setting the two potential-free relay-contacts. LED-digits show the switching functions.

The background of the indicator is black to facilitate reading of the red digits.

Preferably switch panel or front panel mounting.

4.1045.00.xxx

.000

.040

.041

.061

Electr. Input	0 ... 834 Hz 0 ... 20 mA 4 ... 20 mA 0 ... + 10 V
Display range	0 ... 40.0 m/s, or depending on sensor type
Resolution	± 1 Digit
Display	LED, red, 13 mm high
Contact	throw-over-switch
Operating voltage	230 V / 50 Hz
Model	switch panel mounting
Protection	IP 20
Dimensions	96 x 48 x 104 mm
Weight	0.3 kg



Indicator

Analogue indicator for the direct connection to the Wind Transmitter (small model),
order-no. 4.3400.30.000

4.3421.00.000

Display range	0 ... 35 m/s 0 ... 65 kn 0 ... 12 Beaufort
Division	2 m/s 5 kn
Electr. input	0 ... 1 mA DC
Model	wall mounting case
Protection	IP 65
Class	2
Dimensions	122 x 120 x 85 mm
Weight	0.55 kg

Wind Indicators, Recorder, Software

Description	Order-No.	Technical Data	
Indicators, WD			
Digital Indicator WD for panel mounting Flat-section indicator for display of wind direction values. The background of the indicator is black to facilitate reading of the red digits. Preferably switch panel or front panel installation.	4.1044.10.xxx .040 .041 .061	Display range Electr. input Resolution Display Operating voltage Model Protection Dimensions Weight	0 ... 360° 0 ... 20 mA 4 ... 20 mA 0 ... + 10 V ± 1 digit LED, rot, 13 mm high 230 V / 50 Hz switch panel mounting IP 20 96 x 48 x 104 mm 0.3 kg
Combined Indicators WS/WD			
Combined Indicator Digital indicator which indicates wind direction in a circle of red LED's and wind speed in digits in the centre of the circle. Yellow scale inscription on black background. Suitable measuring transmitters of the Small Wind Transmitters-Line: Small Wind Transmitter 4.3515.30.000 Wind direction transmitter 4.3127.40.000	4.3228.30.000	Display range Resolution Display Operating voltage Model Protection Dimension Weight	0 ... 99.9 m/s, or 0 ... 99.9 kn 0 ... 360° 0.1 m/s resp. kn 22.5° 3-digits LED 7 segment red, 8 mm high 16 LED bars, red 230 V / 50 Hz or 11 - 24 V DC switch panel mounting IP 42 96 x 96 x 110 mm 0.6 kg
Combined Indicator Digital indicator which indicates wind direction in a circle of red LED's and wind speed in digits in the centre of the circle. Yellow scale inscription on black background. Suitable measuring transmitters of the compact-line : Wind transmitter 4.3518.00.000 Wind direction transmitter 4.3128.00.000	4.3228.40.000	Display range Resolution Display Operating voltage Model Protection Dimensions Weight	0 ... 99.9 m/s, or 0 ... 99.9 kn 0 ... 360° 0.1 m/s resp. kn 22.5° 3-digits LED 7 segment red, 8 mm high 16 LED bars, red 220 V / 50 Hz or 12 - 24 V DC switch panel mounting IP 42 96 x 96 x 110 mm 0.6 kg



Wind Indicators, Recorder, Software



Description	Order-No.	Technical Data
<p>Wind Display Digital indicator for the display of wind speed and wind direction.</p> <p>Indicates the wind direction in a circle of 72 LED luminous bars, and the speed by 7-segment-LEDs.</p> <p>In addition, the minimum and maximum wind speed values can be indicated by two other digit displays.</p> <p>Display options of the WS:</p> <ul style="list-style-type: none"> - instantaneous value or - 2 min. means value and maximum value or - 10 min. mean value and maximum value <p>Display options of the WD:</p> <ul style="list-style-type: none"> - instantaneous value or - 2 min. mean value and variation or - 10 min. mean value and Variation <p>The calculation of the mean values and maximum values is carried out according to the ICAO.</p> <p>A built-in RS-422-interface facilitates the connection of other wind indicators LED:</p> <p>Suitable wind transmitters:</p> <p>4.3303.22.000 / 008 4.3125.32.100 4.3336.31.000 4.3350.00(10).000 4.3800.00(20).xxx 4.3519.00.000 4.3129.00.000</p>	<p>4.3250.xx.000 .00... .01...</p>	<p>Operating voltage 230 V / 50 Hz; 24 V AC; 12 V –35 V DC 115 V / 50 Hz; 24 V AC; 12 –35 V DC</p> <p>Display range Wind speed 0...99.9 / 0...999 m/s / kt / km/h / Bft Direction 0...360°</p> <p>Resolution Wind speed 0.1 / 1 Wind direction 5°</p> <p>Wind transmitter input WS WD 0...1600 Hz Thies- synchronous serial or WD + WS serial data telegram via RS 422</p> <p>Interface RS 422</p> <p>Connection Screw terminal Ambient temp. -10...+50°C Model switch panel mounting Protection IP 50 Dimensions 144 x144 x135 mm Weight 1.5 kg EMC EN 60945 EN 61000-6-2 EN 61000-6-3</p>

Wind

A digital thermometer with a black plastic casing. The front face features a large circular scale with temperature markings in degrees Celsius (0, 30, 60, 90, 120, 150) and degrees Fahrenheit (32, 86, 132, 176, 212). A red LED display in the center shows the number '11.3'. Above the display is a small orange square icon. To the right of the display is a red 'MAX' indicator. Below the display are two yellow circular buttons. The thermometer is shown against a blue background.

Wind Indicators, Recorder, Software



Description

Recorder

Continuous Line Recorder

Designed for the continuous recording and the direct reading of wind measuring values.

Instrument as switch-panel-installation housing. Identification of individual channels by different colour pens.

Order-No.

9.3392.10.040

9.3393.10.040

9.3395.10.040

Technical Data

Number of channels	1 2 3
Electr. input	0 ... 20 mA / 0 ... 10 V
Accuracy	class 0.5
Print colour	blue, red, green
Recording width	100 mm
Paper advance	20, 60, 120, 240 mm/h
Model	switch-panel-mounting
Operating voltage	230 V / 50 Hz
Ambient temp.	0 ... +50°C
Type of protection	IP 54 or IP 20
Dimensions	144 x 144 x 295 mm
Weight	6.2 kg

Recorder Roll

Recording chart in roll format for the above line recorder.

205434

Roll length	32 m
-------------	------

Felt Pen

Spare pens for identification of the different channels for above line recorder.

205433

205432

205431

Colour	blue (1. channel) red (2. channel) green (3. channel)
--------	-------------------------------------------------------------

Software

Meteo-Online

The software Meteo-Online is a WINDOWS Program, compatible to WINDOWS 98 / NT / 2000 / ME/XP.

It serves for the visualisation and documentation of meteorological measuring values. The visualisation is carried out alternatively in graphical form as diagram and/or with text. The user has the possibility to place the display-elements free on the screen.

The documentation can be recorded in hour's- or day's files with selectable averaging periods for the respective parameters. The documentation files are ASCII-files, and can be imported, for example, directly into EXCEL. All THIES-instruments with serial data output can be connected via the serial interface of a PC. According to the number of serial interfaces it is possible to administrate several instruments at the same time. The Client Server Concept offers the possibility of documenting data in the background without active visualisation

9.1700.98.000

Connectable	Thies instruments
-------------	-------------------

Wind Interface	4.4070.01.706
Wind Display	4.3250.xx.000
Datalogger	9.1740.xx.x1x

US-Anemometer	4.3800.xx.xxx 4.3810.xx.xxx
---------------	--------------------------------

Meteo comp	4.3329.00.000 with 9.3229.00.000
------------	-------------------------------------

Illustration	numerals diagram wind rose time date
--------------	--------------------------------------------------

Wind direction	instantaneous value variation mean value, gliding
----------------	---------------------------------------------------------

Wind speed	instantan, value 1 s mean value, gliding min. and max. value
------------	--------------------------------------------------------------------

Time intervals	1, 2, 10, 30, 60 min. for mean values
----------------	------------------------------------------

9.1700.98.100

Description and data same as above, however with data monitor for checking the incoming measuring values additionally on threshold values or alarm parameters.



Wind Wind Alarm

Description	Order-No.	Technical Data
Wind Alarm Unit 2 Triggers a threshold value contact for a set velocity value. There are two LEDs on the front plate which indicate the operational control and the switching status of the alarm threshold. The delay times, the switching point and the measuring intervals can be set by means of the rotary switch on the front panel. There is a code switch to set the following wind transmitter models: 4.3303.22.000 4.3515.30.000 4.3515.50.000 4.3518.00.000 4.3519.00.000 4.3520.00.000	4.3241.00.000 .00.001 .02.000 .02.001 .03.000	Operating voltage 230 V / 50 Hz 230 V / 50 Hz 24 V AC/DC 24 V AC/DC 12 V AC/DC Alarm range Resolution Electr. input Switching point Switch-on-delay. Switch-off-delay. Measuring interval Relay output Contact load Ambient temp. Operating voltage Protection Dimensions Weight incl. supply for heating w/o supply for heating incl. supply for heating w/o supply for heating 1 ... 39 m/s 0.1 m/s see models selectable in 1 m/s 1 - 9 s resp. 2 - 18 s 1 - 9 resp. 2 - 18 min. depends on time intervals 1 s or 2 s selectable change-over switch, one-pole 200 W / 24 V DC 100 W / 250 V DC 1000 VA, max. 8 A -25 - + 55 °C 230 V / 50 Hz IP 65 200 x 120 x 75 mm 1 kg
Wind Alarm Unit 3 For the display of the current wind speed values and for triggering a threshold value contact. Switches on the front plate for setting the switching point and the switch-on/switch-off-delays. Suitable wind transmitter Best.-Nr. 4.3303.22.000	4.3242.01.000	Measuring range Electr. input Display Contact load Switching point Switch-on delay Switch-off delay. Operating voltage Protection Dimensions Weight 0 ... 50 m/s 0 ... 1042 Hz 00.0 ... 99.9 m/s 200 W / 24 V DC 100 W / 250 V DC 2000 VA, max. 8 A 0 ... 50 m/s, selectable 0 - 18 s, in 9 steps 0 - 18 min., in 9 steps 230 V / 50 Hz IP 65 200 x 120 x 75 mm 1 kg
Wind Alarm Unit 4 For digital display of the current wind speed value. Triggers two threshold value contacts, for example early warning and main alarm. Switches on the front plate for setting the switching points and the switch-on/switch-off-delays. Instrument with integrated power supply unit for the supply of the wind transmitter heating.	4.3242.02.000	Measuring range Electr. input Display Contact load Switching point Switch-on delay. Switch-off delay. Operating voltage Protection Dimensions Weight 0 ... 50 m/s 0 ... 1042 Hz 00.0 ... 99.9 m/s 200 W / 24 V DC 100 W / 250 V DC 2000 VA, max. 8 A 2 x 0 - 50 m/s, selectable 2 x 0 - 18 s, in 9 steps 2 x 0 - 18 min, in 9 steps 230 V / 50 Hz IP 65 230 x 300 x 85 mm 2.6 kg
Suitable wind transmitter Best.-Nr. 4.3303.22.000		

Wind alarm units in combination with wind transmitters trigger preventive measures to protect wind-endangered objects.




Applications:

- cranes
- masts
- louvers and shutters
- stages etc.
- bridges
- greenhouses
- awnings






Wind

Masts and mechanical Accessories

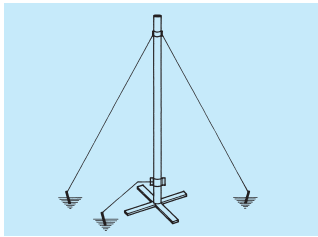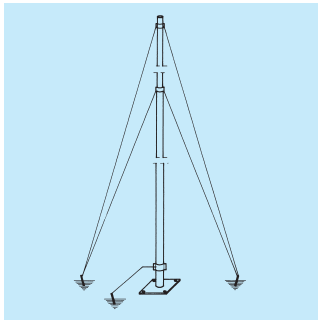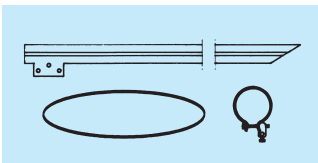	Description	Order-No.	Technical Data	
	Instrument Holders			
	Instrument Holder For field installation of meteorological measuring instruments. Consisting of mast tube, mounting cross, earth pins for ground installation or dowel pins for fundament as well as a staying and earth clamp.	4.3187.11.000	Length Diameter of tube Material Weight	2.5 m 48 mm steel, galvanised ca. 12 kg
	Instrument Holder For the mounting of meteorological measuring instruments in buildings. For wall mounting consists of mast tube, 2 wall clamps and an earth clamp.	4.3187.11.048 4.3187.11.060	Diameter of Tube Length Material Weight	48 mm 60 / 48 mm 4 m steel galvanised ca. 10 kg
	Telescopic Mast for Field Installation			
	Telescopic Mast For the field installation of meteorological measuring instruments. Mast with staying, base plate and adaptor. The base plate has a tilting mast receptacle.	4.3179.00.000 4.3180.00.000 4.3181.00.000	Length Material Top of mast Inserted length Staying Wind stress	Weight 21 kg 29 kg 44 kg al, sea-water-proof Ø 49 mm approx. 1.5 m three-fold (4 m, 6 m) six-fold (10 m) max. 60 m/s
	Grounding Set To ground the preceding telescope masts. Consists of a mast ground clamp, a cross-bar, 2m long, and a CU wire Ø 5 mm, 1 m long.	4.3186.00.000 4.3186.00.001 4.3186.00.002	Suitable for Weight	Gripping diameter 60mm 80 mm 90 mm 4.5 kg
	Telescopic Mast without Staying			
	Telescopic Mast For the mounting of meteorological measuring instruments. This telescopic mast can be used in the open country, in combination with a respective tilting device, without staying.	4.3179.30.080 4.3180.30.090 4.3181.30.116 4.3181.30.132	Length / weight Top of mast Material	Diameter of tube 80/71 mm 90/80/71 mm 116/102/90/80/71 mm 132/116/102/90/80/71 mm Ø 71 mm aluminium







Wind Masts and mechanical Accessories

Description	Order-No.	Technical Data
Tilting Devices		
Tilting Device For field mounting on fundament The tilting device serves as stand for a telescopic mast. Telescopic mast and tilting device are free-standing, and do not need any staying. For maintenance purpose the telescopic mast can be tilted by means of a rope winch (optional accessory).	4.3181.03.080 .090 .116 .132	Suitable for 4.3179.30.080 4.3180.30.090 4.3181.30.116 4.3181.30.132 Height 1580 mm Material steel, galvanised Weight 60 kg
Tilting Device For wall mounting The tilting device serves as wall mounting device for a telescopic mast. For maintenance purpose the telescopic mast can be tilted by means of a rope winch (optional accessory).	4.3181.13.080 4.3181.13.090 4.3181.13.116 4.3181.13.132	Suitable for 4.3179.30.080 4.3180.30.090 4.3181.30.116 4.3181.30.132 Material Steel, galvanised Weight 32 kg
Mast Mounting Clamp Type: LMB 80/90/116/132 For wall mounting of the telescopic mast.	210363 210364 211278 210368	Suitable for 4.3179.30.080 4.3180.30.090 4.3181.30.116 4.3181.30.132 Diameter 80/90/116/132 mm Material aluminium Weight 0,5 / 0,7 / 1,3 / 1,5 kg
Mast Ground Clamp LE Clamp to be mounted at the mast foot for grounding the mast by means of a wire with diameter up to 9 mm.	210457 210458 211279 210460	Suitable for 4.3179.30.080 4.3180.30.090 4.3181.30.116 4.3181.30.132 Gripping diameter 80 mm 90 mm 116 mm 132 mm Material aluminium Weight ca. 0.13 kg
Adaptor Type: LRD 71-50 A-6/16 Serves for reducing the diameter of the mast end tube from 71 mm to 50 mm so that Classic-wind transmitters or US-Anemometers can be mounted directly onto the mast top.	211545	Material aluminium Weight 1 kg



Wind

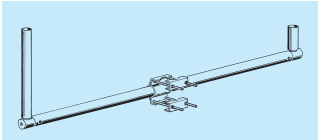Masts and mechanical Accessories

	Description	Order-No.	Technical Data	
	Traverses Traverse for Classic Wind Transmitters For mounting the wind speed transmitter and wind direction transmitter jointly onto a mast. The traverse is connected with plug according to the transmitter combinations.	4.3170.00.xxx000001003	Wind Transmitt. 4.3303.22.000 4.3303.22.000 4.3105.22.000 Material Tube dimensions Fixing boring Horizontal Sensor distance Vertical Sensor distance Total height Weight	Wind Direc. Transm. 4.3120.22.018 4.3121.32.000 4.3120.22.018 steel, galvanised 1 1/2" n. DIN 2448 (Ø 48.3 x 2.6 mm) Ø 50 x 74 mm 0.6 m 0.02 m 0.71 m 6.8 kg
	Traverse for Classic Wind Transmitters For mounting the wind speed transmitter and wind direction transmitter jointly onto a mast. With boring for mounting the lightning rod 4.3100.99.001			
		4.3173.01.001	Material Tube dimensions Fixing boring Horizontal- Sensor distance Vertical Sensor distance Total height Weight	aluminium, anodised DIN 2448 (Ø 48.3 x 2.6 mm) Ø 71 x 74 mm 0.6 m 0,02 m 0.71 m 3 kg
	Traverse for Classic Wind Transmitters For mounting the wind speed transmitter and wind direction transmitter jointly onto a mast.	4.3172.00.000		Sensor distance Vertic. Sensor distance Total height Mast clamp Material Weight 0.6 m approx. 400 mm 650 mm Ø 40 ... Ø 80 mm aluminium 2.8 kg
	Traverse For Small Wind Transmitters For mounting the wind transmitter and wind direction transmitter jointly onto a mast.	4.3171.20.000	Clamping range Sensor distance Material Traverse Gripping clamp Weight	Ø 30 ... Ø 50 mm 0.5 m aluminium stainless steel 0.35 kg
	Traverse for Wind Transmitters compact For mounting the wind speed transmitter and wind direction transmitter jointly onto a mast.	4.3171.30.000 .31.		Ø 48 Ø 102 mm Ø 116 ... Ø 200 mm 0.8 m aluminium stainless steel 0.35 kg
	Traverse, short For Wind Transmitters compact For mounting the wind speed transmitter and wind direction transmitter jointly onto a mast.	4.3171.40.000 .41.	Clamping range Sensor distance Material Traverse Mounting set Weight	Ø 48 Ø 102 mm Ø 116 ... Ø 200 mm 0.8 m from mast aluminium stainless steel 0.30 kg

Wind Masts and mechanical Accessories

Description	Order-No.	Technical Data			
Lightning Rod / Hangers / Holders / Adaptors Lightning Rod To be mounted additionally at the telescopic mast, tube or traverse. Protects the wind transmitter against damages caused by lightning strokes. Suitable for: Mast or tube with Ø 50 mm Mast or tube with Ø 50 mm Mast or tube with Ø 71 mm Traverse: 4.3173.01.001 Traverse: 4.3171.30/31/40/41...	 <				

Please contact us for other accessories, such as cables and cable connections as well as for additional constructions of masts or systems.

Wind power supply



Description

Power Supply

Power Supply Unit

For the power supply of wind speed transmitters, wind directions transmitters or combined instruments. The outputs are each protected by fuses. The housing is made of plastic fibre.

Suitable for:
Wind transmitter type: Classic

Order-No.

9.3388.00.000

Technical Data

Primary	230 V / 50/60 Hz
Secondary	26 V AC / 3.46 A
	24 V AC / 0.5 A
	12 V DC / 0.3 A
Protection	IP 65
Dimensions	125 x 125 x 125 mm
Weight	2.5 kg



Power Supply Unit compact

For the power supply of wind speed transmitters, wind direction transmitters or combined instruments.

With integrated terminal strip for the connection and distribution of the cables. The primary and secondary voltages are protected by safety fuses.

Suitable for:
Wind transmitter type: Classic
: Compact

9.3389.10.000

Primary voltage	230 V / 50/60 Hz /
Secondary voltage	0.48 A
	2 x 24 V AC / 20 VA
	1 x 24 V AC / 5 VA
	1 x 24 V AC / 70 VA
Terminal strip	1 x 24 V DC / 2 W
Housing	20-pole
Protection housing	plastic fibre
Dimensions	IP 65
Weight	190 x 280 x 130 mm
	4.2 kg



Connection Box 1 compact

For the power supply of wind speed transmitters, wind directions transmitters or combined instruments.

With integrated over-voltage-protection (varistors). Can be used also as junction box.

Suitable for:
Wind transmitter type : Classic
: Compact

Meas. value sensor : Clima - Sensor 2000

9.3199.00.100

Primary voltage	230 V / 50/60 Hz
Secondary voltage	2 x 24 V AC / 20 VA
	1 x 24 V AC / 70 VA
	or
	1 x 24 V AC / 20 VA
	1 x 24 V AC / 70 VA
	1 x 24 V DC / 1.5 W
Terminal strip	14-pole
Over-voltage-protection	all connections
Housing	aluminium
Protection housing	IP 65
Dimensions	160 x 260 x 90 mm
Weight	4.5 kg



Connection Box 1 compact

Unit for the power supply of the Ultrasonic Anemometer.


With integrated over-voltage-protection (varistors). Can be used also as junction box.

9.3199.00.150

Primary voltage	230 V / 50/60 Hz
Secondary voltage	2 x 24 V AC / 20 VA
	1 x 24 V AC / 70 VA
	or
	1 x 24 V AC / 20 VA
	1 x 24 V AC / 70 VA
	1 x 24 V DC / 1.5 W
Terminal strip	14 pole
Over-voltage- protection	all connections
Housing	aluminium
Protection housing	IP 65
Dimensions	160 x 260 x 90 mm
Weight	4.5 kg

More power supply units and connection boxes on request.

THIES –
as versatile as require
the international tasks

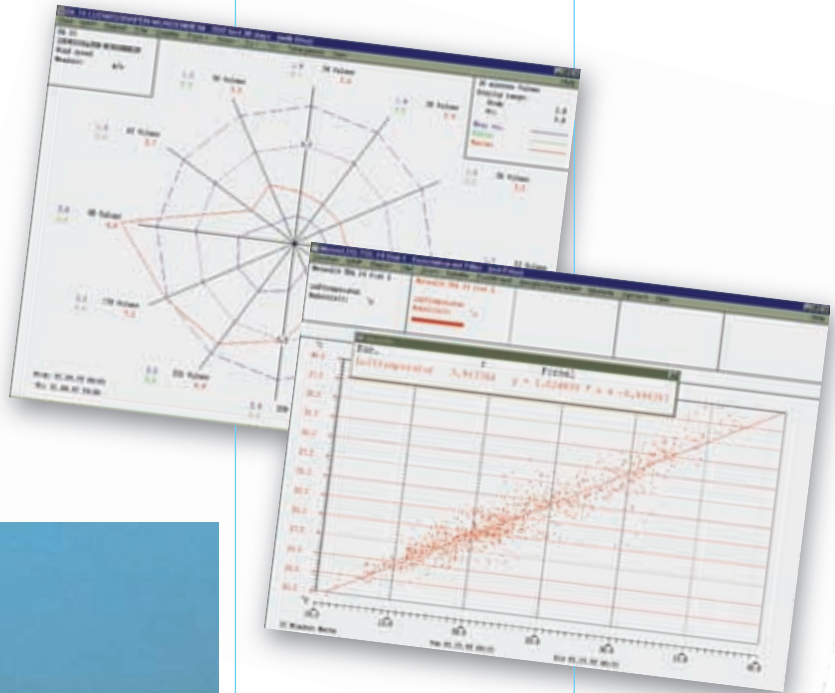

Weather and Environmental monitoring Technology needs a competent partner **THIES CLIMA – Worldwide**

Climatic measurement and intelligent analysis are international tasks. They do not only demand a worldwide cooperation of the responsible authorities, but also a comprehensive network of sensors and analytical systems. We have developed a smoothly functioning system of partners and subsidiaries throughout the world to provide expert advice there where you need it.

THIES assumes complete supervision of the task at hand, from project planning to the installation of the system, from staff training to the processing of the measurement results.

Should you want to contact one of our foreign partners, please write or call us first in Göttingen. We will provide you with the exact address.

Europe:

Austria
Belgium
Denmark
Finland
France
Greece
Italy
Netherland
Norway
Portugal
Spain
Sweden
Switzerland
Turkey
United Kingdom

Overseas:

Argentina
Australia
Brasil
Canada
Columbia
Chile
Ecuador
Egypt
Hongkong
India
Indonesia
Malaysia
Maroc
Peru
Saudi Arabia
South-Africa
Syria
Venezuela



ADOLF THIES GMBH & CO KG
Meteorology-Environmental Technology
Box 3536 + 3541
D-37025 Göttingen
Phone +49 551 7 90 01 -0
Fax +49 551 7 90 01 -65
E-Mail info@thiesclima.com
www.thiesclima.com



DIN EN ISO 9001
Certificate: 08/100/1688